


WIPER AM 44

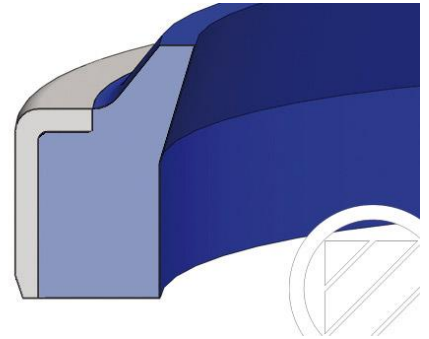

DESCRIPTION

Product group: Wiper

Design: M with metal bonded fit

Profile no.: 44

Material: TPU 95, steel acc. to DIN EN 10139

INSTALLATION

The AM 44 is a single-acting wiper. Because it is pressed against the rod, dirt is wiped from the surface by the action of the rod as it retracts. On the outer diameter, a metal caged ring is vulcanised onto the TPU body.

OPERATIONAL APPLICATION LIMITS

Temperature (°C): -40 to +100

Running speed (m/s): ≤ 2

REMARKS

The metal caged ring ensures the correct functional fit of the wiper in the installation housing. Wipers made of TPU are well suited for application in mobile hydraulic systems which are subjected to heavy dirt loads. Due to the good wear resistance of Polyurethane, the AM 44 has a long service life.

MEDIA

- Hydraulic oils acc. to DIN 51524 Part 1 – 3
- Lubricating oils
- Mineral oil based lubricating greases
- Highly non-flammable hydraulic fluids HFA, HFB, HFC acc. to VDMA 24317

FUNCTION

The AM 44 is a single-acting wiper. Because it is pressed against the rod, dirt is wiped from the surface during the descent of the rod. On the outer diameter, a metal angle ring is vulcanised onto the TPU polyurethane body.

